


Quilt

Indoor Unit



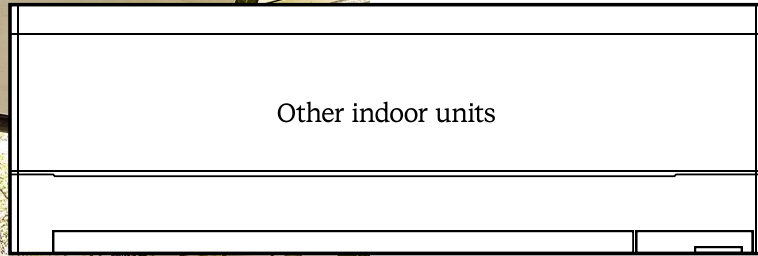

12 in
(30.5 cm)



Quilt

7 ⁷/₈ in
(20 cm)

Small in size, big in efficiency

At only 7 ⁷/₈ in (20 cm) tall, Quilt's indoor unit is built to fit into more spaces, blend in with your home style, and save you more energy.

Powered to perform

As part of the most efficient ductless system on the market, Quilt's indoor unit is powerful enough to condition rooms of all size.





Quilt blends right in

Choice of two premium covers: real white oak veneer or a white option that is paintable or ready for wallpaper.



The smartest way to heat and cool your home

Brings room to temperature in minutes

Built-in accent light to set the mood

Industry-leading occupancy detection*

Quieter than rainfall at 27-48 dBA

Over-the-air updates and upgradeable module unlock new features and improved performance

* Can detect presence within 15 ft (4.6 m)

Indoor Unit

Model QI1-M09-N-NA

SEER2	Up to 25.3
HSPF2, Region IV	Up to 12
HSPF2, Region V	Up to 9.5
EER2	Up to 14.5
CEE Tier (2025)	Tier 1 Path A & B
Energy Star™ Cold Climate	Yes
Outdoor unit combination	1-zone or 2-zone outdoor unit (QO1-M2Z18-NC-NA) 3-zone outdoor unit (QO1-M3Z27-NC-NA)

Rated in accordance with AHRI standard 210/240 (AHRI #217882880, #214609234, and #217933624)

Sound pressure level	27 dBA to 48 dBA
Max airflow	Up to 353 cfm
Input power type	Powered from outdoor unit (208/230V, 60 Hz)
Rated input current	0.8 A
Recommended wire size (indoor to outdoor)	14 AWG



Operating temperature	32°F to 104°F (0°C to 40°C)
Operating altitude	Up to 6500 ft (2000 m)
Gas pipe OD and recommended line set	3⁄8 in (10 mm)
Liquid pipe OD and recommended line set	1⁄4 in (6 mm)
Min line set length per IDU	11 2⁄5 ft (3.5 m)
Max line set length per IDU	98 ft (30 m)

Overall dimensions*

A Width	38 1⁄4 in (971 mm)
B Height	7 7⁄8 in (200 mm)
C Depth	8 3⁄16 in (207 mm)
Weight	24 1⁄2 lbs (11 kg)

Recommended clearances

D From ceiling	4 in (102 mm) Minimum 2 1⁄2 in (64 mm) required
E Below	18 in (457 mm)
F From floor	6 ft (1.8 m)
G Sides	6 in (152 mm)

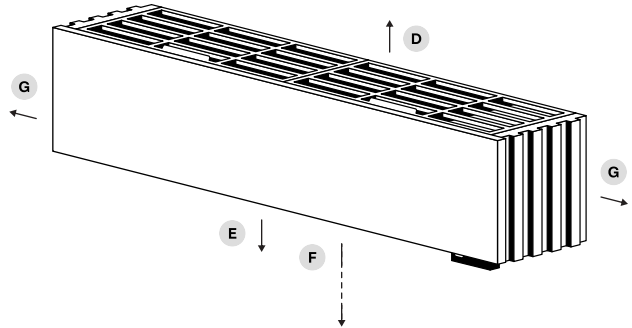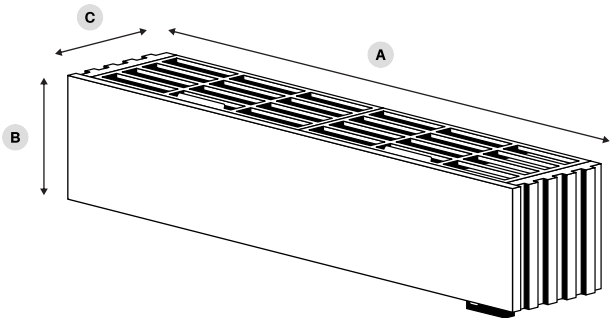

* Visual dimensions of the outdoor unit. Small features extend past this envelope.